

FORM PTO-1390 (REV 10-97)		U.S. Department of Commerce Patent and Trademark Office		ATTORNEY'S DOCKET NUMBER CM00565P	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. 09/913418	
INTERNATIONAL APPLICATION NO. PCT/EP00/01734		INTERNATIONAL FILING DATE 25 FEBRUARY 2000		PRIORITY DATE CLAIMED 26 FEBRUARY 1999	
TITLE OF INVENTION: FREQUENCY TRACKING LOOP AND METHOD OF FREQUENCY TRACKING					
APPLICANT(S) FOR DO/EO/US AFTELAK.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the application time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</p> <p>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p style="margin-left: 40px;">a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 40px;">b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</p> <p style="margin-left: 40px;">c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371 (c)(2)).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p style="margin-left: 40px;">a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 40px;">b. <input type="checkbox"/> has been transmitted by the International Bureau.</p> <p style="margin-left: 40px;">c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p style="margin-left: 40px;">d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 16 below concern other document(s) or information included:</p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input type="checkbox"/> A FIRST preliminary amendment.</p> <p style="margin-left: 40px;"><input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>14. <input type="checkbox"/> A substitute specification.</p> <p>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>16. <input type="checkbox"/> Other items or information:</p>					

533 Rec'd PCT/PTO 13 AUG 2001

U.S. Application No (if known, see 37 CFR 1.5) 09/913418		International Application No PCT/EP00/01734		Attorney Docket Number CM00565P	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS	PTO USE ONLY
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search report has been prepared by the EPO or JPO\$930.00 International preliminary examination fee paid to USPTO (37 CFR 1.482)\$720.00 No International preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445 (a)(2)).....\$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$1,000.00 Intentional preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 930.00					
Surcharge of \$130.00 for furnishing the oath and declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). +				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	15 - 20 =		X \$18.00	\$	
Independent Claims	3 - 3 =		X \$80.00		
Multiple dependent claim(s) (if applicable)			+\$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 930.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL:				\$ 930.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$	
TOTAL NATIONAL FEE =				\$ 930.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED =				\$ 930.00	
				Amount to be refunded	\$
				charged	\$ 930.00
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>13-4772</u> in the amount of \$ <u>930.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. <u>13-4772</u> . Two duplicate copy of this sheet is enclosed. Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.					
Send all correspondence to: Motorola, Inc. Intellectual Property Department, 3rd Floor 1303 E. Algonquin Road Schaumburg, Illinois 60196					
<i>Steven R. Santema</i> STEVEN R. SANTEMA Attorney for Applicant(s) Reg. No.: 40,156 Telephone: (847) 538-7588 Fax No.: (847) 576-3750					

533 Rec'd PCT/PTO 13 AUG 2001
09/913418

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANTS: Motorola, Inc INT'L APPLICATION NO: PCT/EP00/01734
CASE NO.: CM00565P--AFTELAK INT'L FILE DATE: 25 FEBRUARY 2000
ENTITLED: FREQUENCY TRACKING LOOP AND METHOD OF FREQUENCY
TRACKING

Motorola, Inc.
Corporate Offices
1303 E. Algonquin Road
Schaumburg, IL 60196
August 13, 2001

CERTIFICATE OF EXPRESS MAILING / FILING UNDER 35 U.S.C. 371

COMMISSIONER OF PATENTS
& TRADEMARKS
BOX PCT
Washington D.C. 20231

Sir:

I certify that the above-referenced FILING UNDER 35 U.S.C. 371 was deposited,
postage prepaid, as Express Mail having the mailing label number written below with the
United States Postal Service addressed to:

COMMISSIONER OF PATENTS
& TRADEMARKS
BOX PCT
Washington D.C. 20231

on Monday, August 13, 2001

By: Candace Watson

Date: August 13, 2001

Mailing Label No.: EL 060185430 US _____

Frequency Tracking Loop and Method of Frequency TrackingTechnical Field

- 5 The present invention relates to the field of radio communication systems. Particularly, but not exclusively, this invention relates to radio receivers for mobile digital radio communication systems.

Background

- 10 Mobile radio communications systems generally comprise a number of mobile or portable radio units. The radio units in a public- or private mobile radio communications system are often referred to as 'mobile stations'. The radio communication system's infrastructure comprises fixed nodes, termed 'base stations', through which mobile stations can communicate.
- 15 Normally, a mobile station is within communication range of a base station. In this case, the mobile station will communicate through the base station, this mode of operation typically being termed 'trunked mode'. However, some mobile radio communication systems allow an individual mobile station to set up
- 20 a direct radio link to another mobile station, without the communication link passing through the infrastructure of the communication system. This form of communication between two mobile stations is referred to as 'direct mode' operation.
- 25 Mobile stations operating in direct mode have to receive radio signals that typically show greater variation in their parameters than radio signals received from the infrastructure of the communications system. This is because of differences in the signals transmitted from a mobile station in comparison to those from a base station of the infrastructure. As an example, the lower quality
- 30 clock of a mobile station may cause greater variation in the carrier frequency of the signal broadcast by the mobile station in comparison to that from a base station.
- 35 The information carried by any digital communications system can only be recovered after the receiver has first synchronised to the received signal. The high frequency signal reaching the receiver will be at a frequency that depends on the frequency of an oscillator in the transmitter. A further oscillator in the

receiver is used to down-convert the high frequency received signal. Because the oscillators in the transmitter and the receiver do not work at precisely the same frequency, the down-converted signal in the receiver has a slightly different frequency than that which would arise if the two oscillators had

5 identical frequencies. This mismatch is part of the reason why a synchronisation circuit is needed in the receiver, to 'compensate' for the down-converted signal not having its ideal, theoretical frequency value. The mismatch will typically vary with time.

10 Thus there is a need in a mobile digital radio system for synchronisation in the radio receiver. The state where synchronisation between the receiver and the received signal has been attained is often referred to simply as 'lock'. The need for accurate synchronisation is particularly great for direct mode operation of mobile stations, because of the greater variation in the parameters of the

15 received radio signals. This applies both to:

- (i) achieving synchronisation when a call is first set up; and
- (ii) maintaining synchronisation during a call.

20 In the Terrestrial Trunked radio system (TETRA), direct mode operation is permitted. A direct mode call is set up by sending two frames (8 slots) of synchronisation bursts, which last for 113 msec. In terms of the requirements on the automatic frequency correction (AFC) algorithm in the receiving radio, the radio needs to synchronise to these bursts, in order to start decoding data as quickly as possible. After synchronisation at call set up, the receiver must then

25 maintain synchronisation for the duration of the call. This requires the receiver to follow variations in the frequency of the received signal. This action of following is often referred to as 'tracking'. The part of the receiver which carries this out is the 'tracking loop'.

30 The synchronisation bursts are an example of a 'training sequence'. A 'training sequence' is a sequence of symbols in a communications signal which are known to both the transmitter and the receiver.

Figure 1 shows a prior art arrangement of a frequency tracking loop 10. This is a 'feedback' tracking loop. Figure 1 shows a generalised arrangement in order to explain the principle of operation of a frequency tracking loop.

35

Briefly, the elements shown in figure 1 are:

- 5 (i) A mixer 22. One input to the mixer, element 20, provides the radio signal received by the receiver, which may have been 'down-converted' to intermediate frequency. This down-converted signal is the 'input' to the frequency tracking loop. The oscillator used to down-convert the received high frequency signal to intermediate frequency is not shown in figure 1. It is however this oscillator which is partly responsible for frequency variations in the input signal. The output of the mixer is provided on output 24.
- 10 (ii) A 'data matched' filter 26. The filter is matched to the pulse shape of the received signal. This means that it is designed to filter pulses of the shape transmitted by the transmitter of the radio system.
- 15 (iii) A decimation circuit 30. The decimation circuit 30 reduces the number of samples supplied to it from the filter 26. Decimation circuit 30 reduces the number of samples to one per received pulse. This is enough to identify each received pulse.
- 20 (iv) A Viterbi & Viterbi Frequency estimator 34. This is a known circuit element, which implements a known method of measuring frequency offset. Estimator 34 uses the training sequences in making the estimate of frequency offset. Other prior art arrangements are however known which do not rely on the training sequences to achieve this.
- 25 (v) A complex phase determining and scaling circuit 38.
- (vi) A loop filter 42.
- 30 (vii) An oscillator 46. The output of oscillator 46 is fed back on output 48 to provide the second input to mixer 22.

The purpose of the circuit shown in figure 1 is to 'track' variations in the frequency of the input signal. Elements (ii)-(vi) drive oscillator 46 to generate a
35 signal which matches the frequency of the input signal. As there is a time delay in the oscillator generating a signal that has the same frequency as the input to

the frequency tracking loop, the 'following' action provided by the whole frequency tracking loop is not instantaneous.

5 In operation of the feedback tracking loop, the frequency estimator 34 and phase and scaling block 38 give an estimate of the frequency offset from the current input. This estimate will be noisy.

10 The noisy estimates are passed through the loop filter 42, which reduces the noise and defines the transient response of the frequency tracking loop 10.

15 The bandwidth chosen for the loop filter 42 is a compromise between two requirements. One of these is the requirement to reject noise. This dictates that the loop filter 42 have a narrow bandwidth. The other requirement is that the frequency tracking loop 10 be able to track a changing input frequency. This dictates that the loop filter 42 have a wide bandwidth. Clearly these requirements set conflicting conditions on the loop filter 42.

20 Frequency tracking loops of the prior art are known, which switch the bandwidth of the tracking filter during acquisition of a signal. A wide bandwidth is used to acquire the signal, and the bandwidth of the loop filter is narrowed during tracking.

25 Frequency tracking loops are also known in the prior art which adapt the loop filter bandwidth in dependence on the size of the estimate of frequency. However, adaptation of the loop is based on the measurement of the error between the currently received and currently generated frequencies. This measurement itself may be in error and can lead to an adaptation that suppresses the wanted signal.

30 A need exists to alleviate problems of the arrangements known from the prior art. One particular problem addressed by the present invention is to provide optimum frequency tracking in a feedback tracking loop.

5

- 20

30

The invention also comprises a method of frequency tracking for a digital radio communications system. The method of frequency tracking comprises:

- 5 (i) in a means for correcting frequency offset, receiving an input radio signal comprising bursts of known data;
- (ii) estimating the frequency offset of the output signal from the means for correcting frequency offset, to provide an estimate of frequency offset;
- 10 (iii) filtering the estimate of frequency offset with a variable filtering bandwidth, to provide a filtered signal;
- (iv) generating a signal having a frequency dependent on the filtered signal, to
- 15 provide a generated signal;
- (v) correcting the frequency of the input radio signal in the means for correcting frequency offset, using the generated signal;
- 20 wherein the variable filtering bandwidth depends on at least one characteristic of the currently received burst of known data.

The method of frequency tracking may further comprise changing the bandwidth of the variable bandwidth filtering in dependence on the length of the currently

25 received burst of known data.

The invention provides an adaptive frequency tracking loop and method of frequency tracking, which have optimised frequency tracking. This tracking provides rapid and precise automatic frequency control within the feedback

30 tracking loop in response to changes in the input frequency to the loop. The adaptive loop has better performance than conventional techniques. The frequency tracking loop has a better chance than prior art circuits of maintaining lock when the signal level is low.

35 The invention is particularly advantageous for a digital radio communications receiver operating in direct mode.

Brief description of the drawings

Figure 1 illustrates a prior art frequency tracking loop.

5

Figure 2 illustrates in detail one embodiment of a frequency tracking loop in accordance with the invention.

Figure 3 illustrates one embodiment of a method of frequency tracking in accordance with the invention, in the form of a flow chart.

10

Detailed description of the preferred embodiment

Figure 2 illustrates one embodiment of a frequency tracking loop in accordance with the invention. The frequency tracking loop of figure 2 is an adaptive loop.

15 The circuit of figure 2 is a frequency tracking loop 100 for a digital radio communications system. The input to the frequency tracking loop is a received radio signal. The signal input to the frequency tracking loop may have been converted into an intermediate frequency signal and then to base-band prior to reaching frequency tracking loop 100. Alternatively, the input signal may have
20 been directly converted from high frequency down to base-band in a direct converter. The input radio signal comprises bursts of known data. In a TETRA or GSM signal, these bursts of known data are the training sequences.

The received radio signal is supplied to the first input 120 of a mixer 122 in the
25 embodiment of figure 2. However, other means for correcting frequency offset, such as for example a complex multiplier, could be used here. Mixer 122 supplies an output signal on output 124.

The signal on output 124 is fed to matched filter 126, and then to a decimation
30 circuit 130.

After decimation, the signal may be fed to circuit element 154. Element 154 serves to extract the training sequences from the signal. These training sequences are used by element 134, a Viterbi & Viterbi Frequency estimator.

Frequency estimator 134 provides an estimate of the frequency offset of the output signal from the mixer. An element corresponding to element 154 may also be used in the prior art arrangement of figure 1, but was not shown there for reasons of clarity of illustration.

5

The estimate of the frequency offset is fed to a complex phase and scale circuit 138, and then to a variable bandwidth filter 142. The variable bandwidth filter 142 provides a filtered signal on output 144.

10 The filtered signal on output 144 is fed to an oscillator 146. Typically, oscillator 146 is a voltage controlled oscillator. However, any signal generating means that is suitable for generating an output signal with a frequency that depends on the filtered signal could be used here.

15 The output signal from oscillator 146 is supplied to a second input 148 of the mixer 122. This enables mixer 122 to correct the frequency of the input signal on input 120.

20 The frequency tracking loop of the invention is adapted to change the bandwidth of the variable bandwidth filter 142 in dependence on at least one characteristic of the currently received burst of known data. In accordance with the invention, the frequency tracking loop automatically adapts the bandwidth of the loop filter 142. Therefore the frequency tracking loop is 'adaptive'.

25 In the particular arrangement shown in figure 2, means 150 provide symbol and frame timing information to the whole frequency tracking loop 100. In accordance with the invention, means 150 determines the type of burst of known data received in a slot of the input radio signal. Means 150 can then supply a signal to the variable bandwidth filter 142 identifying the type of burst of known data. The
30 type of burst indicates how many a priori known data symbols are contained within the burst. This information allows adjustment of the bandwidth of the variable bandwidth loop filter on the basis of the length of known data within the received burst.

35 The effect of varying the bandwidth of variable bandwidth filter 142 in accordance with the invention can be understood by considering the operation of

frequency estimator 134. As explained in connection with figure 1, the frequency estimator 34, 134 in the frequency tracking loop derives an estimate of the frequency of the signal output by the mixer. The frequency estimator 134 in the arrangement of figure 2 uses the training sequences to make this estimate.

5

The signal to noise ratio of the frequency estimate provided by frequency estimator 134 is approximately proportional to the number of known symbols used to derive the estimate. Therefore the bandwidth of the variable bandwidth loop filter can be optimised to the signal to noise ratio of the output signal from the frequency estimator 134 by changing the bandwidth in dependence on the number of symbols in the received known data sequence. As explained in detail below, the TETRA and GSM systems use training sequences whose type indicates the number of symbols which they contain.

10

Various detailed arrangements of the invention satisfy the underlying principle of the invention. The invention may be arranged with a frequency tracking loop that is adapted to provide a variable bandwidth filter with a relatively wide bandwidth on receiving a long burst of known data, and a relatively narrow bandwidth on receiving a short burst of known data. The bandwidth may be made proportional to the length of the currently received burst of known data.

20

The function of circuit element 150 is now considered. A receiver of digital data normally has circuitry for recovering the symbols and frames of the received signal. This circuitry provides symbol and frame timing information to the receiver. In fact, the training sequences in the received signal are normally used to facilitate this recovery. Typically, the bits of the known training sequence are compared in a correlator with each successive group of bits of the received radio signal. When the correlation is a maximum, this indicates that the group of bits of the received signal corresponds to the training sequence. Since the receiver knows where in a frame of data the training sequences are located, this correlation technique provides the required information about the start and finish of the frame, and hence the frame timing. In making the correlation determination, the correlator clearly also identifies which type of training sequence is contained in the received radio signal. Therefore element 150 can provide both information about the timing of the training sequences to element

25

30

35

134 in figure 2, and information about the specific type of training sequence received to variable bandwidth filter 142.

Although figure 2 shows a specific arrangement for implementing the teaching of the present invention, the invention is of wider scope than this single embodiment. In the arrangement shown in figure 2, means 150 supplies information about the type of burst to the loop filter 142. However, means 150 may simply determine the number of symbols making up the burst of known data. Means 150 could then supply this information to the variable bandwidth filter 142. Alternatively, means 150 could supply a control signal to the variable bandwidth filter, setting the bandwidth of the filter in dependence on the number of known symbols contained within the burst. The number of symbols and their location is defined by the type of burst, which is determined by identifying the training sequence.

GSM and TETRA radio systems are now considered, in order to provide a numerical example of a practical implementation of the invention. Both GSM mobile telephone systems and TETRA radio systems employ training sequences. Motorola's TETRA compliant radio system is the 'Dimetra' system. When Dimetra subscribers operate in direct mode, the automatic frequency control loop derives its estimate of frequency offset from the training sequences in the received bursts.

TETRA direct mode communication uses two types of training sequence, i.e. bursts of known data, during a call. These are the 'synchronisation burst' (DSB) and the 'normal burst' (DNB).

For the DSB burst, the known training sequences are a 6 symbol preamble, a 19 symbol training sequence and a 40 symbol frequency correction sequence. The data burst therefore comprises a total of 65 symbols.

For the DNB burst, the known training sequences are a 6 symbol preamble and an 11 symbol training sequence. The data burst therefore comprises a total of 17 symbols.

35

Therefore we can expect estimates derived from the DSB bursts to have an average signal to noise ratio 65/17 times better than the estimates derived from the DNB bursts.

- 5 In the particular example of a TETRA system, the inventive frequency tracking loop can adjust the bandwidth of the loop filter in dependence on whether either a DSB or a DNB has been received.

10 When a DSB has been received, the loop bandwidth can be made wider than for a DNB, for example 65/17 times wider. The noise performance of the loop will not suffer significantly, but its ability to track changing frequencies will be enhanced.

15 The arrangement of the invention is valid for other lengths of data burst than the example of DSB and DNB data bursts explained here.

20 This example provided a bandwidth for the variable frequency filter which was 65/17 times wider in the case of a DSB burst than a DNB burst. However, the invention extends to other tracking loops, particularly those with a filter bandwidth for a larger burst that is greater than the bandwidth for a smaller burst by a factor equal to the ratio of the number of symbols in two different types of known data burst.

25 The frequency tracking loop may advantageously be used in a receiver for a digital radio communications system. The receiver incorporating the frequency tracking loop of the invention may be employed in a mobile- or a portable radio, or a mobile telephone.

30 Figure 3 shows a method of frequency tracking in accordance with the invention, in the form of a flow-chart 300.

The method of frequency tracking of figure 3 for a digital radio communications system comprises steps 310-350.

- 35 In step 310, a means for correcting frequency offset receives an input radio signal comprising bursts of known data. These bursts of known data are typically

the TETRA training sequences explained above. The means for correcting frequency offset may comprise, for example, a mixer or a complex multiplier.

- 5 Step 320 of the method comprises estimating the frequency offset of the output signal from the means for correcting frequency offset. This step provides an estimate of frequency offset of the received radio signal.

- 10 In step 330, the estimate of frequency offset is filtered with a variable filtering bandwidth, to provide a filtered signal. The variable filtering bandwidth used depends on at least one characteristic of the currently received burst of known data.

- 15 Step 340 comprises generating a signal having a frequency dependent on the filtered signal from step 330, to provide a generated signal. Typically, an oscillator may generate this signal.

Step 350 comprises correcting the frequency of the input radio signal in the means for correcting frequency offset, using the signal generated in step 340.

- 20 Although step 350 is shown separately from step 310 in figure 3, these steps are both performed in the mixer. See element 122 of figure 2. Once a first estimate of the frequency offset has been found therefore, step 350 can be considered to link back into step 310. This is not illustrated in figure 3 for simplicity.

- 25 In further preferred embodiments of the method of the invention, step 330 may further comprise changing the bandwidth of the variable bandwidth filtering in dependence on the length of the currently received burst of known data. The change of bandwidth may be such as to provide variable bandwidth filtering with a relatively wide bandwidth on receiving a long burst of known data, and
30 providing variable bandwidth filtering with a relatively narrow bandwidth on receiving a short burst of known data. The bandwidth of the variable bandwidth filter may be made proportional to the length of the currently received burst of known data.

- 35 The frequency tracking loops and methods of the prior art do not make use of the expected signal to noise ratio of the individual estimates of frequency offset,

based upon the type of input data burst, to adapt the bandwidth of the loop filter. Thus these prior art arrangements do not have the advantage of the invention, that the tracking performance is improved without impacting on robustness to noise.

Claims

1. A frequency tracking loop for a digital radio communications system, the frequency tracking loop comprising:
- 5 (i) a means for correcting frequency offset, the means for correcting frequency offset receiving an input radio signal comprising bursts of known data at a first input, and supplying an output signal;
- (ii) a frequency offset estimator, supplied with the output signal from the means for correcting frequency offset, for providing an estimate of the frequency offset
- 10 of the output signal;
- (iii) a variable bandwidth filter, supplied with the estimate of the frequency offset from the frequency offset estimator, for providing a filtered signal;
- (iv) a signal generating means, supplied with the filtered signal from the variable bandwidth filter, for generating an output signal with a frequency dependent on
- 15 the filtered signal, the output signal from the signal generating means being supplied to a second input of the means for correcting frequency offset, wherein the frequency tracking loop is adapted to change the bandwidth of the variable bandwidth filter in dependence on at least one characteristic of the currently received burst of known data.
- 20
2. A frequency tracking loop in accordance with claim 1, wherein the means for correcting frequency offset comprise a mixer or a complex multiplier, and the signal generating means comprise an oscillator.
- 25
3. A frequency tracking loop in accordance with claim 1 or claim 2, wherein the frequency tracking loop is adapted to change the bandwidth of the variable bandwidth filter in dependence on the length of the currently received burst of known data.
- 30
4. A frequency tracking loop in accordance with any previous claim, wherein the frequency tracking loop is adapted to provide the variable bandwidth filter with a relatively wide bandwidth on receiving a long burst of known data, and to provide the variable bandwidth filter with a relatively narrow bandwidth on receiving a short burst of known data.

5. A frequency tracking loop in accordance with any previous claim, wherein the frequency tracking loop is adapted to provide the variable bandwidth filter with a bandwidth proportional to the length of the currently received burst of known data.

5

6. A frequency tracking loop in accordance with any previous claim, wherein the bursts of known data comprise one or more synchronisation bursts and one or more normal bursts, the frequency tracking loop being adapted to provide the variable bandwidth filter with a larger bandwidth for the synchronisation burst than for the normal burst, the bandwidth for the synchronisation burst being larger than that for the normal burst by a factor equal to the ratio of the number of symbols in the synchronisation and normal bursts.

10

7. A frequency tracking loop in accordance with claim 1 or claim 2,

15

further comprising means for:

(i) determining the type of burst of known data received in a slot of the input radio signal; and

(ii) supplying a signal to the variable bandwidth filter identifying the type of burst of known data.

20

8. A frequency tracking loop in accordance with claim 1 or claim 2, further comprising means for:

(i) determining the type of burst of known data and the number of symbols making up the burst of known data; and

25

(ii) supplying a control signal to the variable bandwidth filter setting the bandwidth of the filter in dependence on the number of symbols.

9. A receiver for a digital radio communications system, the receiver comprising a frequency tracking loop in accordance with any previous claim.

30

10. A mobile- or a portable radio, or a mobile telephone, comprising a receiver in accordance with claim 9.

11. A method of frequency tracking for a digital radio communications system, the method of frequency tracking comprising:

(i) in a means for correcting frequency offset, receiving an input radio signal comprising bursts of known data;

5 (ii) estimating the frequency offset of the output signal from the means for correcting frequency offset, to provide an estimate of frequency offset;

(iii) filtering the estimate of frequency offset with a variable filtering bandwidth, to provide a filtered signal;

10 (iv) generating a signal having a frequency dependent on the filtered signal, to provide a generated signal;

(v) correcting the frequency of the input radio signal in the means for correcting frequency offset, using the generated signal;

wherein the variable filtering bandwidth depends on at least one characteristic of the currently received burst of known data.

15

12. A method of frequency tracking in accordance with claim 11, further comprising changing the bandwidth of the variable bandwidth filtering in dependence on the length of the currently received burst of known data.

20

13. A method of frequency tracking in accordance with claim 11 or claim 12, further comprising providing variable bandwidth filtering with a relatively wide bandwidth on receiving a long burst of known data, and providing variable bandwidth filtering with a relatively narrow bandwidth on receiving a short burst of known data.

25

14. A method of frequency tracking in accordance with any of claims 11-13, further comprising providing the variable bandwidth filter with a bandwidth proportional to the length of the currently received burst of known data.

30

15. A frequency tracking loop for a digital radio communications system substantially as hereinbefore described with reference to, or as illustrated by, figure 2 of the drawings.

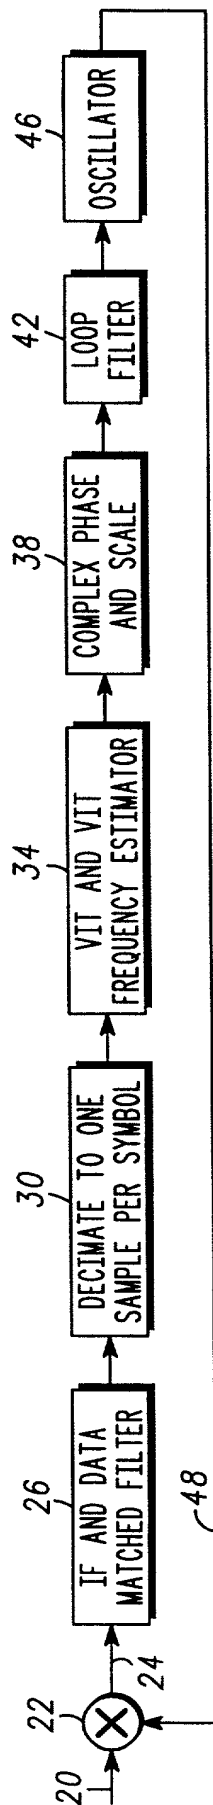


FIG. 1

1/2

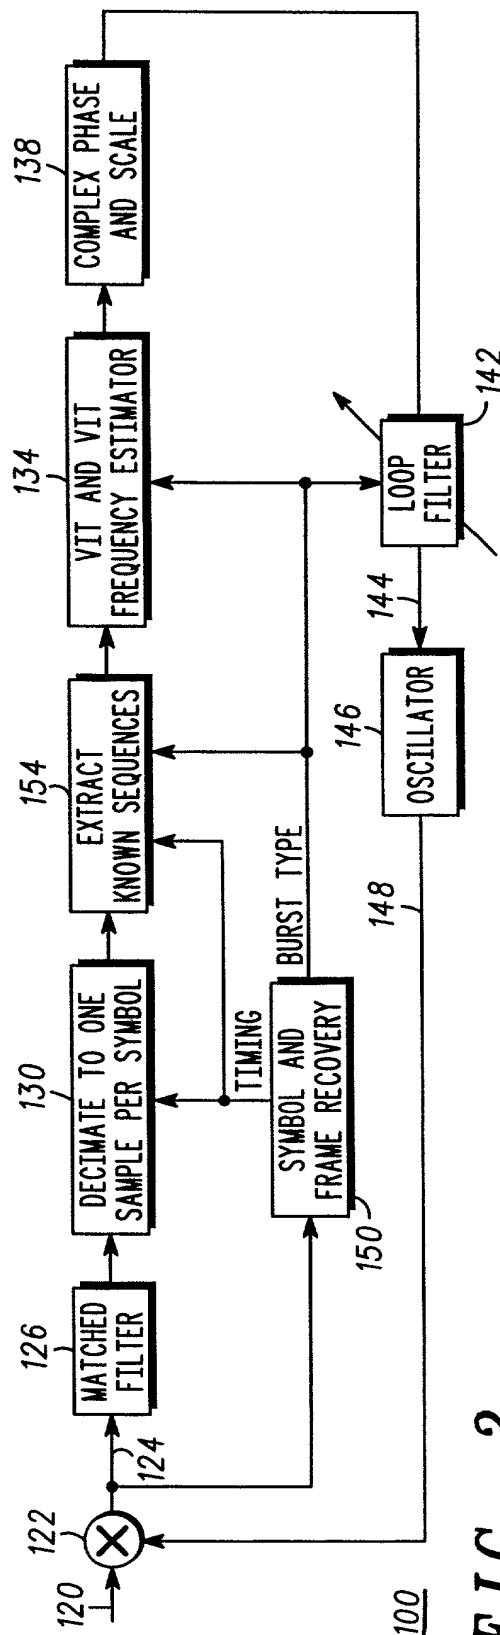


FIG. 2

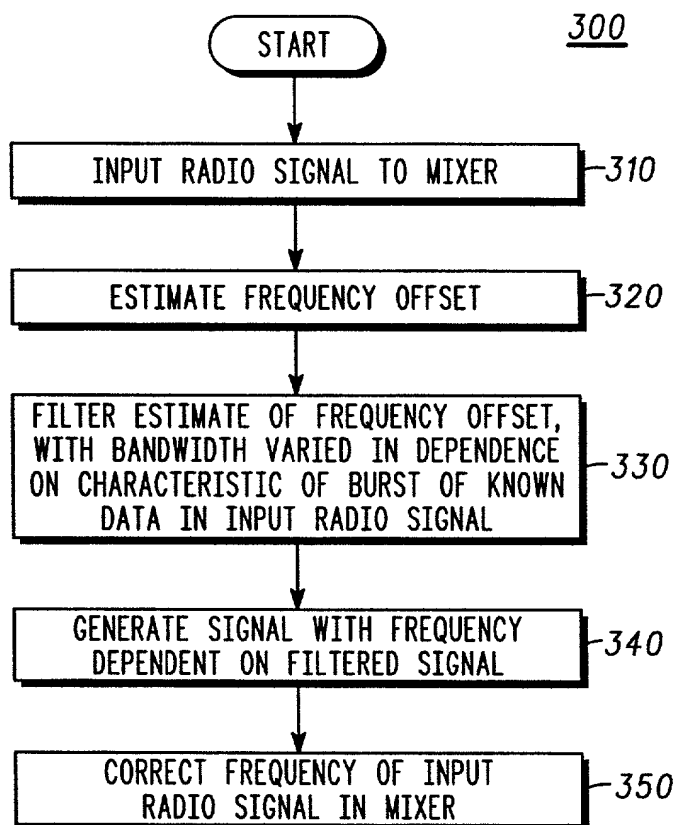


FIG. 3

Attorney Docket CM00565P

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled FREQUENCY TRACKING LOOP AND METHOD OF FREQUENCY TRACKING, the specification of which is attached hereto unless the following box is checked:

☒ Application was filed on 25 february 2000
as Application No. PCT/EP00/01734
and was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed	
<u>9904437.2</u>	<u>gb</u>	<u>26 february 1999</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		
<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal

Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jonathan P. Meyer, Reg. No. 30,477; Doug Fekete, Reg. No. 29,065;
K. Cyrus Khosravi, Reg. No. 40,375; Steven G Parmelee, Reg. No. 28,790; J. Ray
Wood, Reg. No. 36,062; Daniel K. Nichols, Reg. No. 29,420; Val Jean Hillman, Reg. No.
34,841; Susan L. Lukasik, Reg. No. 35,261; Terri S. Hughes, Reg. No. 41,856; Steven R.
Santema, Reg. No. 40,156

Address all telephone calls to Mr. Jonathan P. Meyer at telephone no. (847) 576 0173.

Address all correspondence to Jonathan P. Meyer, Motorola, Inc., Intellectual Property
Section - Law Department, 1303 East Algonquin Road, Schaumburg, IL 60196.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE INVENTOR: FIRST MIDDLE LAST			INVENTOR'S SIGNATURE	DATE:
Andrew John Aftelak			<i>Asmell</i>	26/7/2001
RESIDENCE:			CITIZENSHIP:	
54 Ivar Gardens, Lychpit, Basingstoke, Hampshire RG24 8YD			United Kingdom	
POST OFFICE ADDRESS:				
Same as above				